



### Stratasys H350

Accurate, production-grade parts with best-in-class\* consistency.

Meet high production demands with the Stratasys® H350™ powder bed fusion 3D printer.



## Stay competitive with best-in-class consistency

Grow your part production business for a variety of industries and applications with a workflow you can fully control. Built for high-volume, short-run production, the Stratasys H350 3D printer gives you control of your materials, workflow, production and costs while delivering consistency and accuracy print after print. The Stratasys H350 is the first release of the H Series™ production platform, which has Selective Absorption Fusion™ SAF™ technology at its heart to deliver functional, production-grade parts with best-in-class\* consistency.



<sup>\*</sup>Compared to other powder bed fusion technologies using print heads.

## Achieve superior part quality and repeatability

With its unique thermal management Big Wave™ powder deposition, SAF technology produces high-volume parts with accuracy and repeatability. This gives you part consistency throughout your build and ensures reproducible part quality — even on fine feature details, flat areas and large parts. Produce parts with a uniform, smooth surface that are suitable for a wide range of applications.

### **H350**

\_

flexibility to tailor your own workflow

# Maximize process flexibility and boost your productivity

The H350 3D printer allows users to choose their build preparation software platforms to suit their business needs. With no mandatory cloud connection, no forced firmware updates and the ability to reuse previous print settings, you can have quality control of your production.

The H350's workflow also gives you complete control over your powder quality management and build data so that you can easily certify your production. Its stable process is supported by its industrial-grade components and consistent thermal process. Plus, print heads are not consumable items, so there's no need for frequent recertification — meaning the print process and performance remain steady.

The flexibility to tailor your own workflow empowers you to meet your customers' specifications for different application requirements. Save settings and reuse for repeat builds at any time. Reproduce precise, geometric measurements and mechanical properties to achieve part consistency. Monitor and adjust settings with few consumables, easy upkeep and long-lasting industrial-grade print heads, to produce the part qualities that meet the standards of each application.



### Parts with no hidden costs

With few consumables, easy upkeep and long-lasting industrial-grade print heads, the H350 printer has been designed to last. Maintenance and labor requirements are low, so you can maximize production uptime while minimizing running costs. Fewer restrictions in part orientation mean high nesting density, which maximizes the number of parts per build. If you choose to, you can reuse all of your unfused powder — keeping material costs down and significantly reducing cost per part.

A single fusing fluid also means a simple and predictable cost per part. Additionally, print heads are non-consumables and included as part of your service contract.

### H350 workflow



Nest parts to create a build job.



### 7. Breakout and powder retrieval

Remove parts from a build and retrieve unfused powder.

### 8. Dosing

Retrieve unfused powder and mix with virgin material for printer refill.

### 2. Send

Send print jobs to the printer.

> A. Big Wave powder management system precisely and evenly deposits a new layer.

### 3. Print

SAF technology provides a uniform thermal experience for improved part consistency.

- B. The layer is immediately heated to maintain thermal homogeneity and ensure part quality.
- C. Industrial piezoelectric D. Infrared energy fuses print heads jet high-energy HAF™ high absorption fluid on the powder.
  - the selected areas and underlying particles.

### 6. Build removal

Remove a completed build to cool down.

### 5. Data retrieval

Retrieve data from a build job for quality control and to certify production.

### 4. Monitor

Monitor progress of all printers in your fleet with GrabCad Print Server.

### 9. Powder refill


Put dosed powder in the machine (e.g., 70:30 used-to-virgin ratio).

Additional part-finishing steps:

### 10. Depowdering/bead blasting

Use your choice of equipment to remove any excess powder from the part surface to create a finished raw part.

### Adaptable workflow

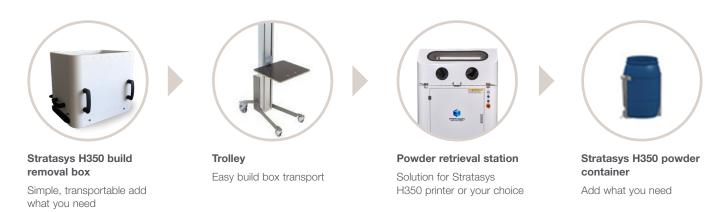

### Powered by SAF technology

SAF technology is an industrial-grade additive manufacturing solution that delivers production-level throughput for end-use parts. This is achieved by selectively jetting HAF fluid with industrial piezoelectric print heads onto a layer of powder-form material in just one, full-width pass.

Thanks to its unique in-line, unidirectional architecture, SAF technology prints, fuses, recoats (with Big Wave powder system) and powder heats in the same direction. The time-controlled manner of these processes ensure a uniform thermal experience and part consistency across the whole bed.

SAF technology jets single or multiple drops of highly loaded fluids to produce fine detail or large fused areas without compromising throughput. It also has the ability to jet unique, high-specialty, functional fluids to process a broad range of powders and manufacture parts with selectively defined point-to-point properties.

Due to the savings of implementing industrial-grade technology, SAF-based products will deliver a competitive cost per part, production-level throughput, part quality and consistency, and a high production yield.

SAF technology jets single or multiple drops of highly loaded fluids to produce fine detail or large fused areas without compromising throughput.



## See the specs

Effective build size (xyz)       315 x 208 x 293 mm (12.40 x 8.18 x 11.53 in)         Effective build volume       19.2 l (5.07 gallon)         Layer thickness       100 μ (0.004 in)         Time to a full build       11.62 hrs.         Power       400VAC, 3P+N+PE, 50/60 Hz, 16A         Consumption       3.25 kW, 5 kW (peak), 0.15 kW (Idle)         Operating conditions	
Layer thickness       100 μ (0.004 in)         Time to a full build       11.62 hrs.         Power       400VAC, 3P+N+PE, 50/60 Hz, 16A         Consumption       3.25 kW, 5 kW (peak), 0.15 kW (ldle)	
Time to a full build         11.62 hrs.           Power         400VAC, 3P+N+PE, 50/60 Hz, 16A           Consumption         3.25 kW, 5 kW (peak), 0.15 kW (Idle)	
Power           Requirements         400VAC, 3P+N+PE, 50/60 Hz, 16A           Consumption         3.25 kW, 5 kW (peak), 0.15 kW (ldle)	
Requirements         400VAC, 3P+N+PE, 50/60 Hz, 16A           Consumption         3.25 kW, 5 kW (peak), 0.15 kW (ldle)	
Consumption 3.25 kW, 5 kW (peak), 0.15 kW (Idle)	
Operating conditions	
<b>Temperature</b> 20-25° C (68-77 deg F)	
<b>Humidity</b> [40-55]% RH	
<b>Extraction rate</b> 300m³/h (177 CFM) with adjustable damper	
Dimensions (W x D x H)	
<b>Printer</b> 1900 x 940 x 1730 mm (74.8 x 37.0 x 68.1 in)	
<b>Printer crate</b> 2156 x 1196 x 2100 mm (84.9 x 47.1 x 82.7 in)	
Weight	
<b>Printer</b> 825 kg (1819 lb)	
Crated printer 950 kg (2094 lb)	
Connectivity	
Network requirements  RJ45 Ethernet connection 35MBit Network with DHCP server and internet access	
Software Software	
Supported software workflow         GrabCAD Print, GrabCAD Print Pro	
GrabCAD Print Server	
Materialise Magics, Siemens NX and PTC Creo	
Certificates	
<b>Safety</b> EN ISO 12100:2010	
Safety EN ISO 12 100.2010	
Electromagnetic DIRECTIVE 2014/30/EU	
·	
Electromagnetic DIRECTIVE 2014/30/EU  REACH, RoHS, WEEE, Modern Slavery Act, CoA,	
Electromagnetic  DIRECTIVE 2014/30/EU  REACH, RoHS, WEEE, Modern Slavery Act, CoA, CoC (and from 2021, Conflict Minerals regulation), TSCA	
Electromagnetic  DIRECTIVE 2014/30/EU  Environmental  REACH, RoHS, WEEE, Modern Slavery Act, CoA, CoC (and from 2021, Conflict Minerals regulation), TSCA  Materials	
Electromagnetic  DIRECTIVE 2014/30/EU  Environmental  REACH, RoHS, WEEE, Modern Slavery Act, CoA, CoC (and from 2021, Conflict Minerals regulation), TSCA  Materials  Powders  Stratasys High Yield PA11, SAF™ PA12	
Electromagnetic       DIRECTIVE 2014/30/EU         Environmental       REACH, RoHS, WEEE, Modern Slavery Act, CoA, CoC (and from 2021, Conflict Minerals regulation), TSCA         Materials       Powders         Stratasys High Yield PA11, SAF™ PA12         Fluid       Stratasys HAF™ high absorption fluid	

<sup>\*</sup> H350 printer consumables refers to H350 parts that wear out relatively frequently and need replacement by the customer. For clarity, H350 printer consumables do not include H350 materials, HAF or powders, and do not include other materials required for the maintenance of the H350 such as cleaning fluids, gloves and swabs.

Learn more about SAF technology and the H350 3D printer at stratasys.com.



### **Stratasys Headquarters**

7665 Commerce Way, Eden Prairie, MN 55344

- +1 800 801 6491 (US Toll Free)
- +1 952 937-3000 (Intl)
- +1 952 937-0070 (Fax)

ISO 9001:2015 Certified

stratasys.com

1 Holtzman St., Science Park, PO Box 2496 Rehovot 76124, Israel +972 74 745 4000 +972 74 745 5000 (Fax)

Distribuidor oficial:



www.asorcad.es

© 2023 Stratasys. All rights reserved. Stratasys, the Stratasys Signet logo, Stratasys Direct Manufacturing, H350, H Series, SAF, Selective Absorption Fusion, Big Wave, GrabCAD Print Pro and HAF are trademarks or registered trademarks of Stratasys Inc. and/or its affiliates. The H350 printer is subject to a license from Loughborough University Enterprises Limited and Evonik IP GmbH under the following and/or related patents and patent applications and their family members: EP2739457, EP3539752, EP1648686, EP 1740367, EP1737646, EP1459871. Further details including live and in-force status of family members may be found at <a href="https://worldwide.com/nc/market/nc/market/">https://worldwide.com/nc/market/n espacenet.com/patent/search/family. All other trademarks are the property of their respective owners, and Stratasys assumes no responsibility with regard to the selection, performance, or use of these non Stratasys products. Product specifications subject to change without notice. BR\_SAF\_H350\_0323a

